




65 mm x 140 mm x 33 mm NTN 6313LLB Deep ball bearings

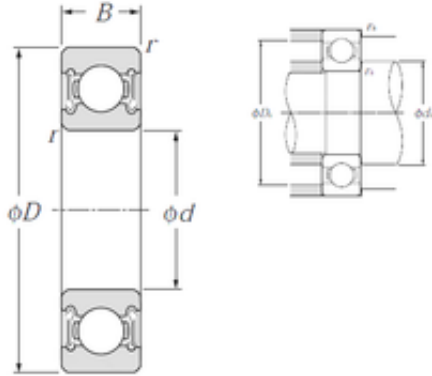

6313LLB Bearing 2D drawings and 3D CAD models

Bearing No. 6313LLB

Size	65x140x33 mm
Bore Diameter	65 mm
Outer Diameter	140 mm
Width	33 mm
d	65 mm
D	140 mm
B	33 mm
C	33 mm
r min.	2,1 mm
da min.	76 mm
da max	86 mm
Da max.	129 mm
ra max.	2 mm
Weight	2,08 Kg
Basic dynamic load rating (C)	92,5 kN
Basic static load rating (C0)	60 kN
(Grease) Lubrication Speed	4 900 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



NTN BEARING MANUFACTURING DE MEXICO,S...

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	65MM Bore; 140MM Outside Diameter; 33MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	4.885
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	5.512 Inch 140 Millimeter
Bore	2.559 Inch 65 Millimeter
Outer Race Width	1.299 Inch 33 Millimeter
bore diameter:	65 mm
static load capacity:	60000 N
outside diameter:	140 mm



NTN BEARING MANUFACTURING DE MEXICO,S...

precision rating:	ISO Class 0
overall width:	33 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	33 mm
snap ring included:	Without Snap Ring
outer ring width:	33 mm
internal clearance:	CN
maximum rpm (grease):	4900 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	92500 N
manufacturer product page:	Click here